



Hydrajaws Rechargeable Digital Gauge

The Hydrajaws rechargeable digital gauge provides many advantages over the standard analogue gauge including more **accurate** and **clearer** results.



Part of the **FREE Hydrajaws VERIFY** Digital Reporting System*



Produce and send the test data to the app on your mobile



Annotate and confirm the data, which is safely stored in the cloud



Create reports, manage and sync your app easily via our online dashboard

Record your test results digitally using the Verify App and manage and generate reports on an online dashboard.




* Free Pro app, optional upgrade to Teams subscription, please see our website for details



Hydrajaws Rechargeable Digital Gauge

- Rise and Fall and Peak Hold modes
- Accuracy of $\pm 1.5\%$ full scale
- Backlit display for viewing in low light conditions
- Tough outer protective cover
- Impact resistant glass
- Configurable units: kN, lbf
- Calibration certificate: Valid for 12 months

TECHNICAL DRAWINGS

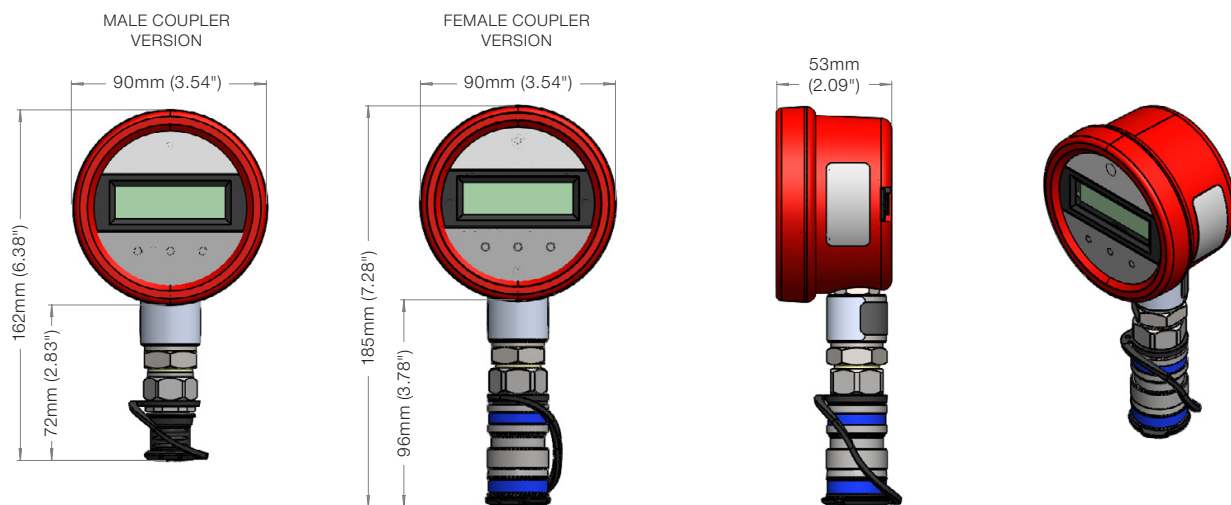

TECHNICAL DATA

- Weight: 0.42kg (0.93lbs)
- Accuracy: $\pm 1.5\%$ Full Scale
- Operating temperature range: -10°C to +50°C (14°F to 122°F)
- IP Rating: IP54 *
- Enclosure material: Glass reinforced Nylon
- Protective boot: Standard
- Backlight: Standard; Green
- Digit height: 8.5mm (0.34")
- Operating voltage: 9V
- Battery type: Rechargeable **
- Charging: via USB
- Maximum input pressure: 1000 bar

GAUGE and PULL-TESTER COMPATIBILITY MATRIX

Bluetooth Digital Gauge with Hydraulic Coupler				M2000	M2050	M2008	M0095	M0097	Wall Tie Tester	Hydraulic Assembly
Part #	kN	lbf	Coupler							
050-079	0-10	0-2248	Male						■	
050-080	0-25	0-5620	Male	■			■	■		
050-081	0-30	0-6744	Male					■		
050-082	0-40	0-8992	Male					■		
050-083	0-50	0-11240	Female		■					
050-084	0-145	0-32597	Male			■				
050-085	0-180	0-40466	Male							■
050-086	0-370	0-83179	Male							■
050-087	0-500	0-112404	Male							■

* BS EN 60529: 1992 + A2: 2013: Degrees of Protection Provided by Enclosures

** Battery model: EBL TB9500, PP3