




Wall Tie Tester Kit

The **Hydrajaws Wall Tie Tester Kit** can test all types of remedial wall tie to meet the requirements of **BRE Digest 401** — investigating the suitability of the base material for a particular tie or during installation to verify the quality of the installation.

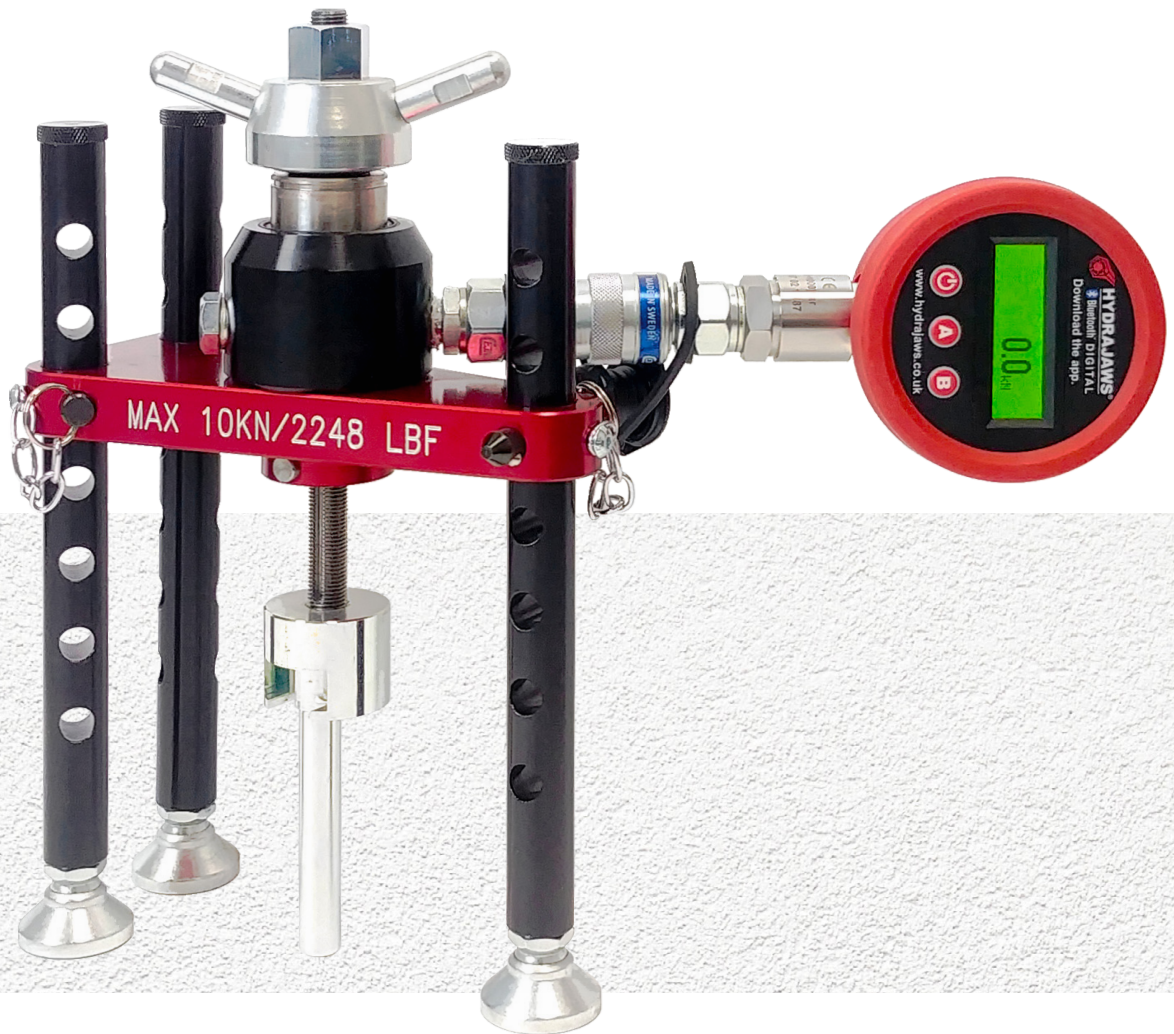

Sign up to the **Hydrajaws Verify Reporting System***

Record your test results digitally, manage your test schedule and generate reports online



* Download our FREE to use App. Requires a digital gauge, see our website for more details



Wall Tie Tester Kit

The **Hydrajaws Wall Tie Tester** Kit MK2 is used for testing all types of remedial wall tie. Trusted by market leading companies, the Wall Tie Tester Kit is an essential tool for carrying out testing procedures in line with **BRE Digest 401**.

Manufactured to exacting high standards, the Hydrajaws Wall Tie Tester Kit contains a small bolt tester adaptor, two threaded rod adaptors and two external wall tie adaptors to test up to a maximum tensile load of 10kN. Optional adaptors are available.

The load spreading bridge keeps reaction loads away from the fixing allowing results to be more consistent.

An appropriate adaptor is mounted directly to the tester.

The purpose of carrying out site tests on wall ties is either as part of a site survey to investigate the suitability of the base material for the use of a particular tie or during installation of the ties to verify the quality of the installation.

The Wall Tie Tester Kit is easy to use and easily transported in its robust carry case. It comes with the backing and support from our technical team at Hydrajaws.

Wall Tie Tester Kit Features

- 0-10kN detachable Dual Scale gauge
- Turning Handle with 22mm (7/8") integrated nut (for use in confined spaces)
- Hydrajaws 12 month gauge calibration certificate
- Each kit comes in a robust carry case

Kit includes the following:

- Operating Nut
- 22mm A/F ratchet spanner
- 10mm spanner
- Small bolt tester adaptor
- 4.5-8mm external wall tie adaptor
- 8-12mm external wall tie adaptor
- M5 and M6 threaded rod adaptors
- 2mm & 3mm Hex key
- Oil bottle



TECHNICAL DATA

- Pull-out load range: 0-10kN (5620 lbf)
- Case weight: 4kg (8.82 lbs)
- Oil type: ISO VG 32 Mineral Based Oil
- Warranty: 12 months
- Part #: 240-001 (Digital)
- Part #: 240-002 (Analogue)

